


LITE 125

The high-performance FAZE LITE 125 features the latest in LED technology with high lumen per watt efficacy and visually dynamic illumination; ideal for large-scale commercial projects that require higher powered fittings.





FEATURES

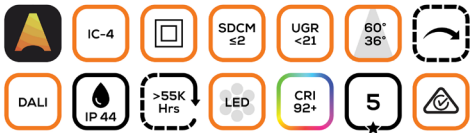- + Precision reflector with clear lens - for better light distribution.
- + Specially designed heat sink - for class leading heat dissipation.
- + IC-4 rated
- + IP44 and suitable for wet areas.
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver (71-CAS600)



GENERAL SPECIFICATIONS

LED	25W
Lumens	(3000K) 2000 lm (4000K) 2100 lm
Efficacy	Up to 81 lm/W
Colour Temperature	 3000K, Warm White  4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black
Beam	60° 36°
CRI	92+
IP	44
Colour Deviation	SDCM ≤2
UGR	<21
Lifetime	>55,000hrs L80 B10
Warranty	5 Years

Please Note: When using C-Bus, user universal or trailing edge dimming modules.

PROJECT DETAILS


PROJECT:

TYPE:

NOTES:

DIMENSIONS

 **Cut Out**
Ø110mm

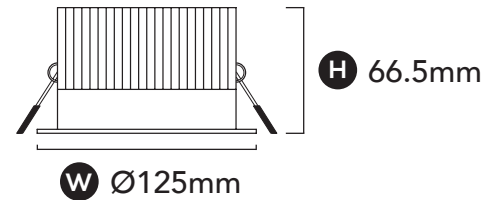

DRIVER SPECIFICATIONS

Dimensions	L 104 x W 43 x H 24
Power	600mA 240V Remote Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

DALI Dimming Available Upon Request

PRODUCT CODES

White, 3000K	118-LI2W25W603
Black, 3000K	118-LI2W25B603
White, 4000K	118-LI2W25W604
Black, 4000K	118-LI2W25B604

REFLECTOR CODES

36° Reflector	118-RFLXL36
---------------	-------------