



radiantlighting®

MODUX 1 STEP LIGHT SOLID EYELID

By LuxR


OUTDOOR

The Modux One Step Light Eyelid is an extra compact luminaire, designed for step lighting applications where the fixture needs to be unobtrusive or concealed. This recessed style provides excellent illumination of exterior steps, paths and bordered areas. The eyelid feature eliminates all upward light, providing a precise, glare-free lighting effect.

PROJECT

TYPE

NOTES

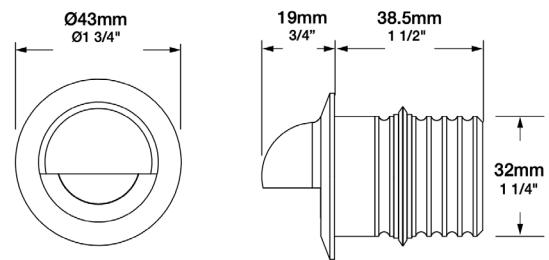

Cutout: Ø 32 mm

GENERAL SPECIFICATIONS

| | |
|---------------------------|--|
| LED | 1 W |
| LUMENS | 30 Lm |
| EFFICACY | 30 Lm / W |
| COLOUR TEMPERATURE | 2700K 3000K 4000K |
| MATERIAL | Natural Copper 316 Stainless Steel Powder Coated Aluminium |
| FINISH | Copper, Stainless Steel, Black |
| BEAM | Asymmetric |
| CRI | 90+ |
| IP | 68 |
| WARRANTY | 10 Years: Copper and Stainless Steel 5 Years: Aluminium & Electronics |
| ORIGIN | New Zealand |

POWER SPECIFICATIONS

| | |
|-------------------------------|---|
| DRIVER SERIES WIRING | 350mA Constant Current (Remote) |
| DRIVER PARALLEL WIRING | 12VAC (Integral) Remote 12V Transformer Required 24VDC (Integral) Remote 24V Driver Required |


PRODUCT CODES (SERIES WIRING)

| | |
|---------------------------|---------------|
| M1 COPPER | 128-M1SLERC30 |
| M1 STAINLESS STEEL | 128-M1SLERC30 |
| M1 BLACK | 128-M1SLERC30 |

PARALLEL WIRING AVAILABLE UPON REQUEST

SERIES WIRING

INPUT 240VAC **OUTPUT** DC Constant Current



PARALLEL WIRING

INPUT 240VAC **OUTPUT** 12VAC | 24VDC

