



radiantlighting®

MODUX MICRO SPIKE SPOT

By LuxR


OUTDOOR

The Modux Micro range of luminaires are the smallest IP rated lighting fixtures in the world. Powered by the LuxR light engine, the unique compact design uses replaceable lighting class 1W LEDs.

PROJECT

TYPE

NOTES

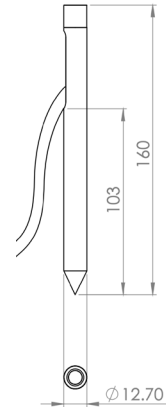

GENERAL SPECIFICATIONS

LED	1 W
LUMENS	70 Lm
EFFICACY	70 Lm / W
COLOUR TEMPERATURE	2700K 3000K 4000K
MATERIAL	Natural Copper 316 Stainless Steel
FINISH	Copper, Stainless Steel
BEAM	16°, 37°, 84°, 18°+48° Oval
CRI	90+
IP	68
WARRANTY	10 Years: Copper & Stainless Steel 5 Years: Electronics
ORIGIN	New Zealand

POWER SPECIFICATIONS

DRIVER SERIES WIRING	60-360mA Constant Current (Remote)
DRIVER PARALLEL WIRING	12VAC (Integral) Remote 12V Transformer Required 24VDC (Integral) Remote 24V Driver Required


PRODUCT CODES

COPPER	128-MMSSRC3730
STAINLESS STEEL	128-MMSSRS3730

PARALLEL WIRING AVAILABLE UPON REQUEST

SERIES WIRING

INPUT 240VAC OUTPUT DC Constant Current

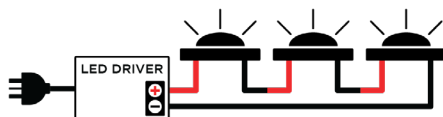

PARALLEL WIRING

INPUT 240VAC OUTPUT 12VAC | 24VDC

