



radiantlighting®

## AGO UP

By LOMBARDO



OUTDOOR + WALL

Suitable for ceiling installation for indoor and outdoor use. Anodised or painted aluminium housing (white finish). High resistance to oxidation thanks to anodising treatment. Screen-printed tempered glass diffuser. Black anodised aluminium base.

### PROJECT

TYPE

NOTES

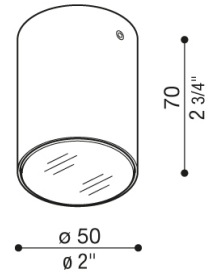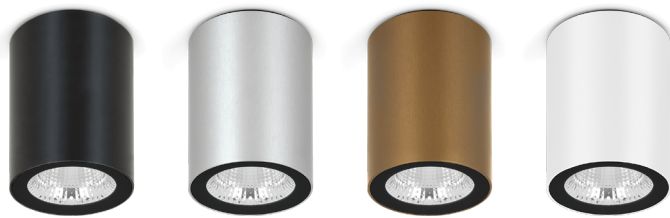

### GENERAL SPECIFICATIONS

LED	5 W
LUMENS	600 Lm
EFFICACY	120 Lm / W
COLOUR TEMPERATURE	3000K / 4000K
MATERIAL	Anodised Aluminium Serigraphed Glass
FINISH	Grey, Black, Brown, White
BEAM	65°
IP	65
CRI	80
COLOUR DEVIATION	SDCM $\leq 2$
WARRANTY	3 Years
ORIGIN	Italy

### POWER SPECIFICATIONS

DRIVER	Integrated
DIMMING	Phase-Cut Dimming
VOLTAGE	AC DIRECT

### PRODUCT CODES

GREY, 65°	48-LL12640GL3
BLACK, 65°	48-LL12640BL3
BROWN, 65°	48-LL12640SL3
WHITE, 65°	48-LL12640WL3