CORE XS

The CORE XS simultaneously creates a stylish feature whilst also providing sufficient task lighting. An ideal luminaire for areas with limited ceiling space.

PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

FEATURES

- High CRI – Defined architectural details and finishes.
- Quick connection system for durability and easy installation.
- Flicker Free Driver
- Available in 3 beam angles, for the perfect light application.
- High quality lens, for superior light emissions.

DIMENSIONS

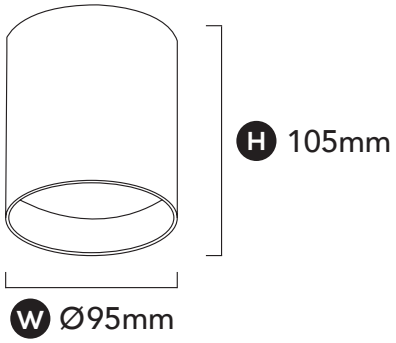

GENERAL SPECIFICATIONS

LED		11W
Lumens	(3000K)	1140 lm
	(4000K)	1200 lm
Efficacy		Up to 110 lm/W
Colour Temperature		3000K, Warm White 4000K, Cool White
Material		Powder Coated Aluminium
Finish		White I Black
Beam		60° I 40° I 20°
CRI		90+
IP		20
Colour Deviation		SDCM ≤2
UGR		<18
Lifetime		>55,000hrs L80 B10
Warranty		5 Years

DRIVER SPECIFICATIONS

Power	300mA 240V Built-In Flicker Free Driver
Dimming	Phase-Cut Dimming
Power Factor	> 0.95

PRODUCT CODES

White, 3000K	**118-CORXS11W603**
Black, 3000K	**118-CORXS11B603**
White, 4000K	**118-CORXS11W604**
Black, 4000K	**118-CORXS11B604**

ACCESSORIES

40° Reflector	**118-LSCX40**
20° Reflector	**118-LSCX20**