

# EDGE Xs

The EDGE Xs packs a powerful punch! Providing intense illumination with very little energy. Featuring a low-height heatsink.



## FEATURES

- + Precision reflector with clear lens – for better light distribution.
- + Specially designed heat sink – for application in minimal ceiling spaces.
- + Deep set lamp position – for visual comfort and glare control.
- + Side facing cable output – for spaces that require a tighter fit.
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 13W (71-CAS350).



## LUMINAIRE OPTIONS

### LED Options

13W <b>STANDARD</b>	10W	8W
1065 lm (3000K) 1070 lm (4000K)	920 lm (3000K) 920 lm (4000K)	740 lm (3000K) 745 lm (4000K)

### Beam Options

60° <b>STANDARD</b>	36°	24°	15°
---------------------	-----	-----	-----

## GENERAL SPECIFICATIONS

Efficacy	Up to 92 lm/W
Colour Temperature	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White   Black
CRI	92+
IP	44
Colour Deviation	SDCM ≤2
UGR	<13
Lifetime	>55,000hrs L80 B10
Warranty	5 Years


## PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

## DIMENSIONS

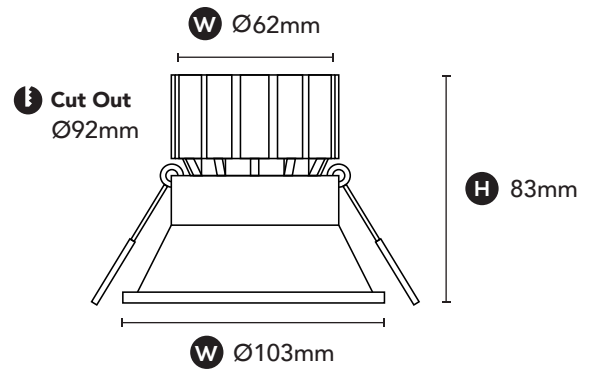

## DRIVER SPECIFICATIONS

Dimensions	L 98 x W 40 x H 22 mm
Power	300mA   240mA   180mA 240V Remote Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

DALI Dimming Available Upon Request

## PRODUCT CODES

White, 3000K	118-ED3X13W603
Black, 3000K	118-ED3X13B603
White, 4000K	118-ED3X13W604
Black, 4000K	118-ED3X13B604

## REFLECTOR CODES

36° Reflector	118-RFLX36
24° Reflector	118-RFLX24
15° Reflector	118-RFLX15